# P3000i


## Compact & Lightweight




**FEATURES**



- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Lightweight and compact.
- Easily transportable by handle.
- Ideal for applications requiring low noise
- Connector for Parallel kit
- Oil Bottle, Funnel and Plugs Included in the carton box

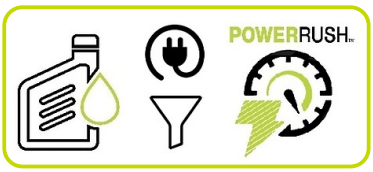


**POWERRUSH**
MORE STARTING CAPACITY ALLOWING YOU TO DO MORE WITH LESS.
Powerrush increases electrical current upon demand, above rated output when starting electric motors.





| PERFORMANCE | | |
|---|---|---|
| Frequency | Hz | 50 |
| Voltage | V | 230 |
| Phase | | 1 |
| Max Power | watt | 2500 |
| Rated Power | watt | 2300 |

www.pramac.com

| Engine | | |
|---|---|---|
| Engine Brand | | Pramac |
| Type | | OHV |
| Exhaust emission level | | Stage V |
| Operating Speed Nominal | rpm | Variable |
| Fuel | | Petrol |
| Starting Systems | | Recoil |
| Oil capacity | l | 0.6 |
| Low Oil Shutdown | | √ |

| Alternator Specifications | |
|---|---|
| Voltage regulation system | Inverter |

| Dimensional data | | |
|---|---|---|
| Length | (L) mm | 565 |
| Width | (W) mm | 339 |
| Height | (H) mm | 467 |
| Dry weight | kg | 27 |
| Carton box dimension LxWxH | mm | 600x340x525 |

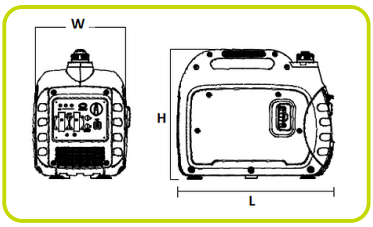


| Autonomy | | |
|---|---|---|
| Fuel tank capacity | l | 4 |
| Fuel consumption 75% | l/h | 1.14 |
| Running time 75% | h | 3.5 |



| Noise level | | |
|---|---|---|
| Guaranteed noise level (LWA) | dB(A) | 88 |
| Noise pressure level @ 7 m | dB(A) | 61 |

## GENSET CONTROL

COMMANDS
- Selector switch: O/I
- Air choke Valve
- Starting handle
- Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.




INSTRUMENTATION:
- Outputting energy (indicator light - Green)
- Overloading and Oil alarming (indicators light - Red)
- Parallel kit receptacles

PROTECTIONS
- Overload; Oil Guard; Overvoltage; Overtemperature
- Protection Control panel IP 44

OUTPUT:
- n°2 USB DC 5V 2A

**SOCKET TYPE**

| | |
|---|---|
| SCHUKO 230V 16A IP44 | 2 |

www.pramac.com

## ACCESSORIES CONTROL PANEL



**PARALLEL KIT**
The Pramac Parallel Kit allows you to double your power when pairing two inverter generators together with the same output*.
By connecting two Inverter to one Parallel kit, customers can meet higher output requirements, powering multiple appliances at the same time for a total output of up to two times the rated power output of each individual Inverter.

**TECHNICAL DATA**
Nominal Tension: 230 V
Frequency: 50 Hz
Phases: 1
Rated Current: 30 A
IP protection: 30


**CONTROL PANEL**
1 x Schuko 16A (IP44)
1 x CEE 32A (IP44)

**CABLES LENGTH:** 450 mm

*Important: Applies when pairing two inverter generators with the same output.
Parallel kit sold separately.

**DIMENSIONS PANEL**

| | | |
|---|---|---|
| Width | (W) mm | 250 |
| Height | (H) mm | 217 |
| Depth | (D) mm | 160 |
| Weight | kg | 1.5 |

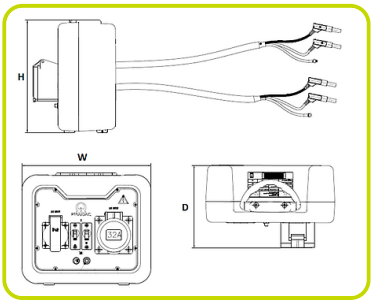


www.pramac.com

The information is aligned with the Data file at the time of download.
Printed on 29/10/2026 (ID 15190)

©2026 | PR Industrial S.r.l. – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc.| All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice