P2200i

Compact & Lightweight




The right power for sensitive voltage surges.

FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Lightweight and compact.
- Easily transportable by handle.
- Ideal for applications requiring low noise
- Connector for Parallel kit
- Oil Bottle, Funnel and Plugs Included in the carton box



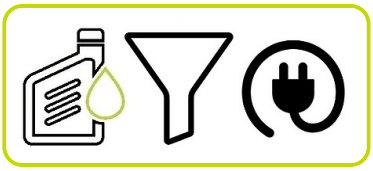

PERFORMANCE		
Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	watt	2100
Rated Power	watt	1900




www.pramac.com

Engine		
Engine Brand		Pramac
Type		OHV
Exhaust emission level		Stage V
Operating Speed Nominal	rpm	Variable
Fuel		Petrol
Starting Systems		Recoil
Oil capacity	l	0.35
Low Oil Shutdown		√

Alternator Specifications	
Voltage regulation system	Inverter

Dimensional data		
Length	(L) mm	505
Width	(W) mm	270
Height	(H) mm	460
Dry weight	kg	21
Carton box dimension LxWxH	mm	583x323x498

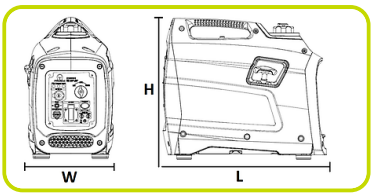

Autonomy		
Fuel tank capacity	l	4.5
Fuel consumption 75%	l/h	1
Running time 75%	h	4.5



Noise level		
Guaranteed noise level (LWA)	dB(A)	94
Noise pressure level @ 7 m	dB(A)	66

GENSET CONTROL

COMMANDS

• Selector switch: O/I • Air choke Valve • Starting handle

• Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

INSTRUMENTATION:

• Outputting energy (indicator light - Green)

• Overloading and Oil alarming (indicators light - Red)

• Parallel kit receptacles

PROTECTIONS

• Overload • Oil Guard

OUTPUT:

• DC 12V 8A • n°2 USB DC 5V 2A



SOCKET TYPE

SCHUKO 230V 16A IP44	1

www.pramac.com

ACCESSORIES CONTROL PANEL



PARALLEL KIT
The Pramac Parallel Kit allows you to double your power when pairing two inverter generators together with the same output*.
By connecting two Inverter to one Parallel kit, customers can meet higher output requirements, powering multiple appliances at the same time for a total output of up to two times the rated power output of each individual Inverter.

TECHNICAL DATA
Nominal Tension: 230 V
Frequency: 50 Hz
Phases: 1
Rated Current: 30 A
IP protection: 30


CONTROL PANEL
1 x Schuko 16A (IP44)
1 x CEE 32A (IP44)

CABLES LENGTH: 450 mm

*Important: Applies when pairing two inverter generators with the same output.
Parallel kit sold separately.

DIMENSIONS PANEL

Width	(W) mm	250
Height	(H) mm	217
Depth	(D) mm	160
Weight	kg	1.5

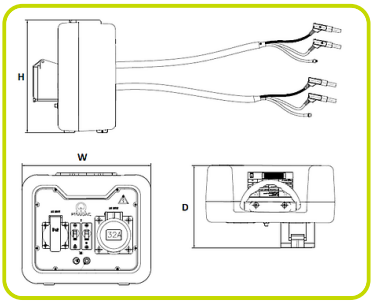

www.pramac.com

The information is aligned with the Data file at the time of download.
Printed on 29/10/2026 (ID 13254)

©2026 | PR Industrial S.r.l. – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc.| All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice