## In-line meter-digital-Al

turbine wheel-G 1" fem-G 1" fem



| | |
|---|---|
| **Item number:** | 23 296 |
| **EAN:** | 4048358232960 |
| **Discount group:** | D |

### Technical data

| | |
|---|---|
| Distance in-/out flange (mm): | 110 |
| Connection on both ends: | G 1" female |
| Media: | diesel, fuel oil, selflubricating low viscosity liquids |
| Flow capacity min. (l/min): | 15 |
| Flow capacity max. (l/min): | 100 |
| Permitted liquid temperature max. (°C): | 40 |
| Permitted ambient temperature (°C): | -10 / +50 |
| Measuring accuracy (%): | 1 |
| Nominal pressure (bar): | 3,5 |
| Burst pressure (bar): | 28 |
| Materials of parts in contact with liquid | |
| Meter housing: | AlSi 12 (sea water resistant) |
| Turbine: | POM |
| Seals: | NBR 70 |
| External dimensions LxWxH (mm): | 110 x 85 x 55 |
| Weight (kg): | 0,48 |



### Specification

- Turbine wheel counter with display
- Manifold connection short, for diesel (25 612 100)
- Double nipple (25 615)
- Totalisator for daily operation 5-digits with floating decimal, resettable to zero, partition 0,0 up to 99999
- Totalisator 5 digits with floating decimal, partition 0,0 up to 999999
- The display can be adapted to the direction of flow in 90° steps



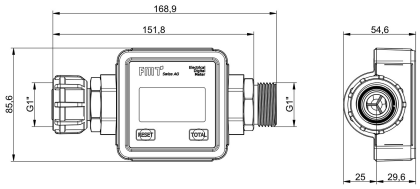
### Special notes

- Suitable for PREMAxx diesel pumps
- Easy to read 4-digits display
- Resettable display
- The metering precision can be adjusted to the viscosity using the calibration scale
- The user can adjust the following indicating units: Litres, gallons, pints, quarts
- Displays: Indication of partial quantity equals current filling level (resettable to zero) + total quantity (resettable to zero) + total quantity (not resettable to zero)



### Packaging

| | |
|---|---|
| Dimensions LxWxH (mm): | 145 x 126 x 78 |
| Weight including package (kg): | 0,57 |
| Packing unit: | 1,0 |


168,9
151,8
85,6
G1"
G1"
RESET
TOTAL
54,6
25
29,6