


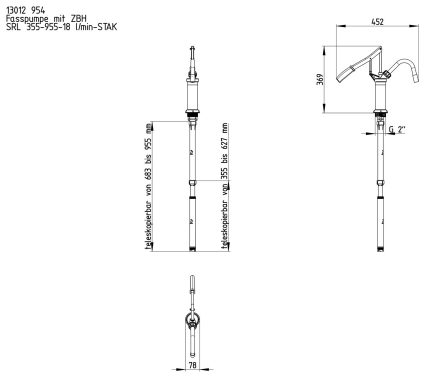

Barrel pump with ZBH

SRL 355-955-18 l/min-STAK

Item number:	13 012 954
EAN:	4103810421020
Discount group:	A

Technical data

Delivery rate (l/stroke):	0,3
Delivery rate at 60 strokes/min (l/min):	18
Pumping media:	oils up to SAE 90
Usage:	container for 60 / 200 / 220 l
Discharge:	steel discharge spout, with anti-drip nozzle, secured by cap screw
Length of suction tube (mm):	355
Immersion depth (two-part) (mm):	355 - 625
Immersion depth (three-part) (mm):	685 - 955
Barrel screw coupling:	G 2" male and 2" male buttress thread

Materials of parts in contact with liquid

Pump head:	impact-resistant zinc die casting
Pump body:	aluminium
Suction pipe:	HDPE (high density polyethylene)
Discharge rigid nozzle:	steel
Seals:	PVC, NBR, FKM

Weight (kg):	1,79

Specification

- Telescopic suction tube (13 094), adjustable in length (from 355 to 955 mm)
- Packed in single carton box
- With EAN bar code

Special notes

- Suitable for use in conjunction with engine oil from SAE 5 W to SAE 50, gear oil from SAE 75 W to SAE 90, fuel oil, diesel, machine oil, cutting oil, petroleum, undiluted anti-freeze
- In case of leakage at the piston, retighten the union nut SW 22
- The ease of dismantling permits simple cleaning
- A suction strainer made of stainless steel can be easily installed without any tools in the suction tube
- The check valve prevents the fluid from flowing back into the container

Packaging

Dimensions LxWxH (mm):	800 x 90 x 90
Weight (kg):	1,98
Packing unit:	1,0