





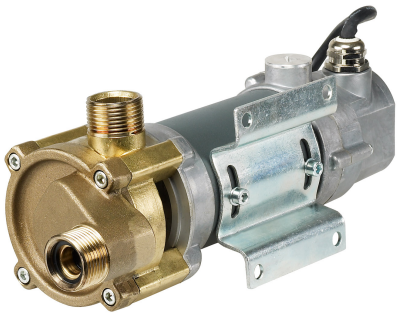







FLUIDAxx 40 l/min-10.6 gpm

12 VDC-G 1" male-G 1" male-WMR

Item number:	23 646
EAN:	
Discount group:	D

Technical data

Connection suction side:	G 1" male
Connection discharge side:	G 1" male
Hydraulic data	
Pump design:	axial gear, self-priming
Delivery rate under free discharge up to (l/min) / (gpm):	40 / 10.6
Suction height up to (m) / (ft):	4 / 13.1
Discharge pressure up to (bar) / (psi):	0,8 / 11.6
Flow media:	fuel oil, diesel, water
Motor data	
Voltage (V):	12 V DC
Power consumption (A):	21
Power (kW):	0,3
Duty cycle (min):	15
Torque (Nm):	0,62
Rotation speed (rpm):	2750
Safety class:	IP44
Materials of parts in contact with liquid	
Pump housing:	brass NFA 51-105
Axial gear:	brass NFA 51-105
Dimensions LxWxH (mm) / (inch):	300 x 170 x 210 / 11.8 x 6.7 x 8.3
Weight (kg) / (lb):	7,7 / 17

Specification

- Sea-water resistant
- Integral non-return valve
- 3 hose inserts with sealing cone DN 25
- 3 sleeve nuts G 1" female, DN 25
- 3 hose clips DIN 3017, adjustable from 25-40 mm
- Suction filter (23 180)
- For mounting use mounting set (23 690)
- Designed for right hand wall mounting (WMR)

Special notes

- Materials guarantee a low weight and an exceptional lifetime with optimized efficiency
- For any situation in which a battery is not available, such as construction sites, in agriculture, on boats etc.

Packaging

Dimensions LxWxH (mm) / (inch):	360 x 170 x 210 / 14.2 x 6.7 x 8.3
Weight (kg) / (lb):	8,5 / 18.7
Packing unit:	1,0