GREASE DISPENSER UNIT, PORTABLE

Article No. 17 788

12 kg Container, manually operated
Container diameter: 185 mm
Container height: 380 mm
Dimension LWH (mm): 480 x 200 x 600



Technical data


Flow media:	lubricating greases, up to NLGI 2
Delivery rate/stroke:	10 cm³
Discharge pressure:	25 bar
Grease supply:	utilizing a hand pump
Filling:	manual, utilizing a removable pump
Discharge hose:	high pressure hose, 11 x 1500 mm
Surface treatment:	all steel components are galvanized
Pump head:	impact-resistant zinc die casting
Lacquering container and Cover:	RAL 7040, window grey satin

Specification


- High pressure grease hose, 11 x 1500 mm
- Spout, angled, M 10 x 1, 150 mm
- Coupler, 4 jaws, M 10 x 1
- Shut-off valve
- with foot rest
- Lacquering, oil-resistant
- Portable, with robust handle
- Pump
- Suction tube, with follow-up plate

Replacement parts list:


Container, complete




Lever, complete



Piston, complete



Hose, complete

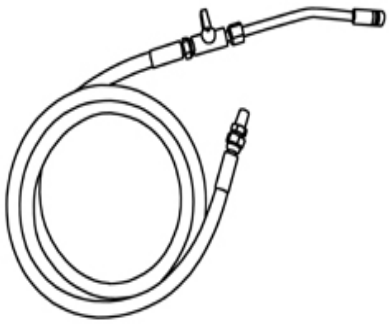

Caution!

Overpressure at the point of lubrication can destroy the grease nibble and if applicable the bearing or the machine.

- Don`t excess the pressures specified.
  Notice the maintenace and service-informations of the machine manufacturor.

PRESSOL Schmiergeräte GmbH ● Parkstraße 7 ● D-93167 Falkenstein ●
Tel. +49 9462 17-0 ● Fax +49 9462 17-208 ● info@pressol.com ● www.pressol.com