
PRESSOL

Lighting-fast filling

G2" **ROTARY PUMP**

- Very compact design
- Complete sealing of the different components through the seals
- Assembly, operation & container change without any addtional tools required
- Completely dismountable - easy to clean
- 3 year warranty when using the supplied suction basket (excluding wear & tear parts)

MORE THAN 100 YEARS since 1914 INNOVATION

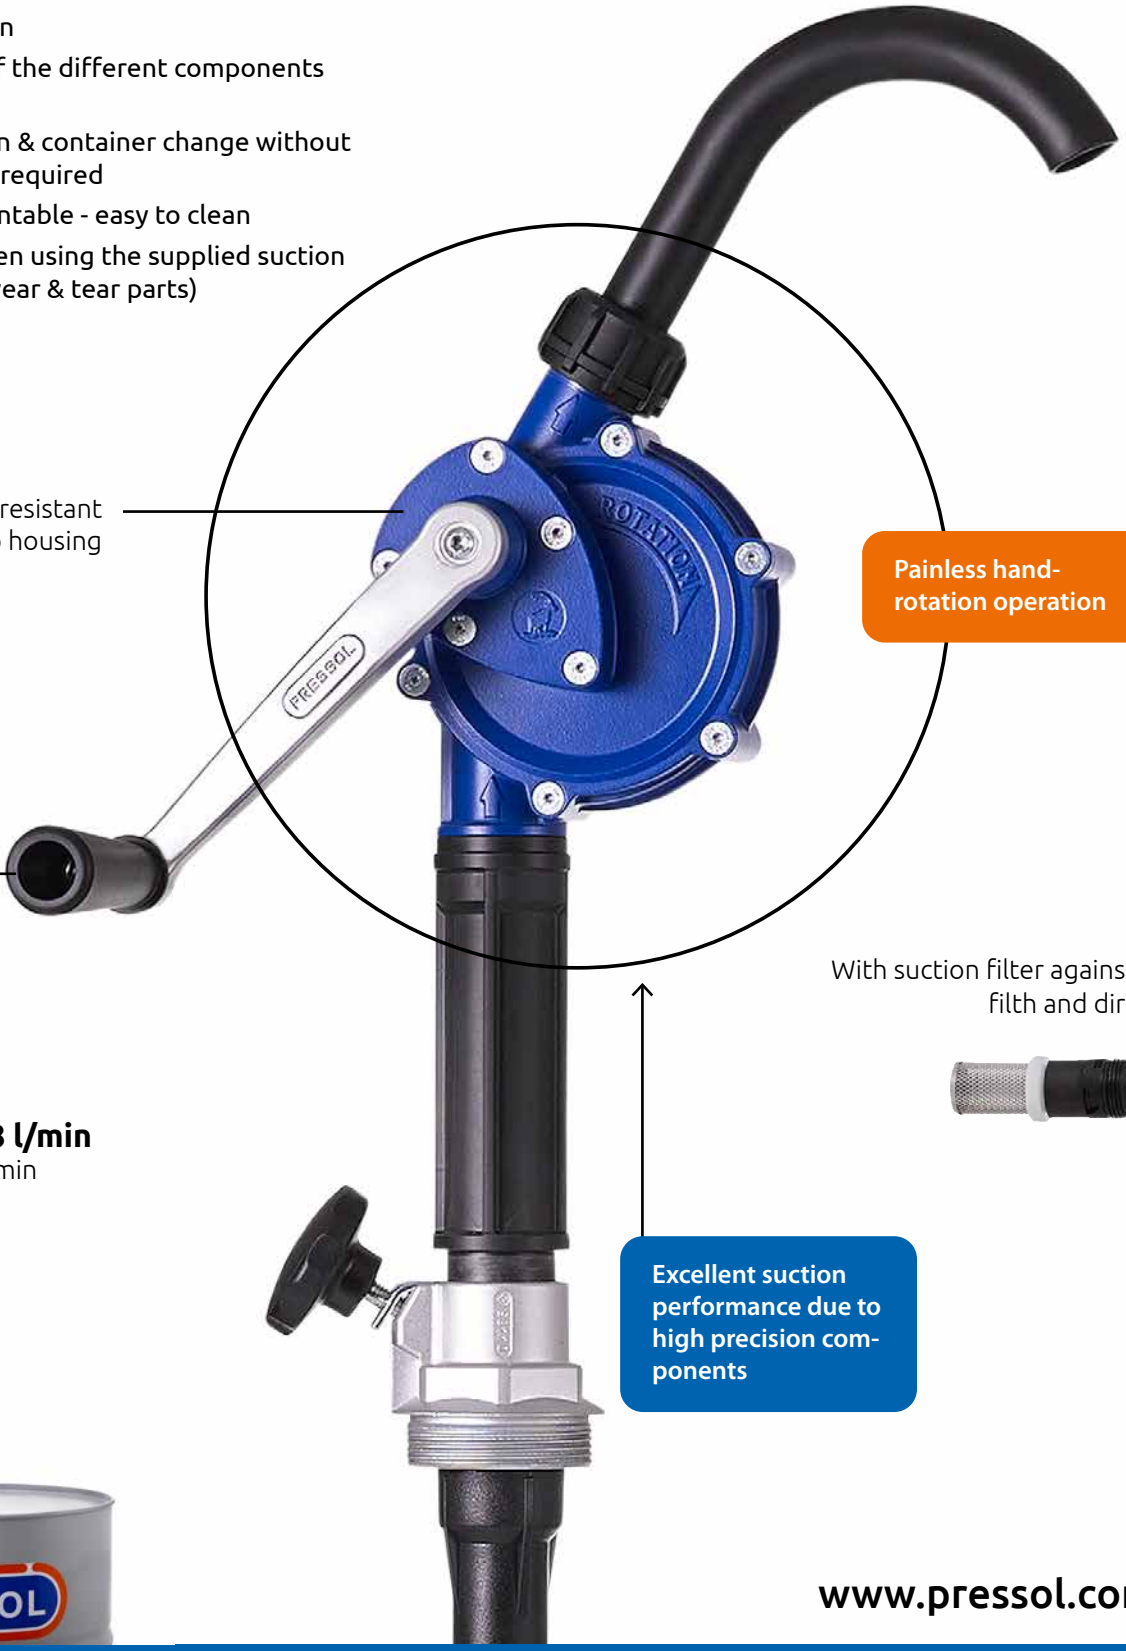

60 × 18 l/min
3.4 gal/min



www.pressol.com

Art.-Nr. 13 055 / 13 056

G2" ROTARY PUMP





Positioning of the spout to avoid any spills



Hose holder
with 13 056



13 056



13 055

355 ⟷ 955 mm
14" ⟷ 38.5"

SPECIFICATIONS

- Telescopic suction tube (13 094) adjustable in length (from 355 to 955 mm)
- Barrel screw adapter G 2'' (13 097 002)
- With suction filter against filth and dirt (04 464)

13 055

With delivery spout

13 056

With 2 m delivery hose and spout,
with steel delivery spout (13 044 020) and hose holder

90832 932 A01

TECHNICAL SPECIFICATIONS

Delivery rate (l/rotation)	0,3
Delivery rate at 60 rotations/min	18 l/min - 3.4 gal/min (Diesel)
Pumping media	Oils, up to SAE 90, self-lubricating, non-aggressive media, fuel oil, diesel, petroleum
Usage	For 60 / 200 / 220 l containers
Application	For filling measuring vessels, storage cans and canisters
Length three-part suction pipe	355 - 955 mm / 14" - 38.5 "
Drum adapter	G 2'' male