

Fluid Management Tecnology

DATA SHEET ARTICLE

AdBlue Electropump AC, Series: Tiger AC - Article:UETP0020



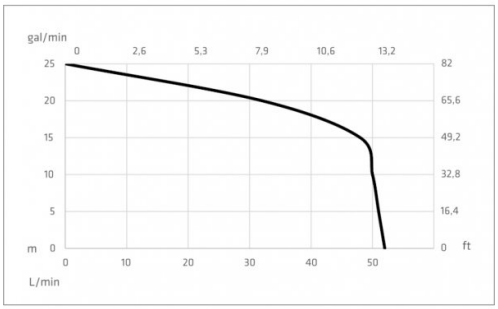

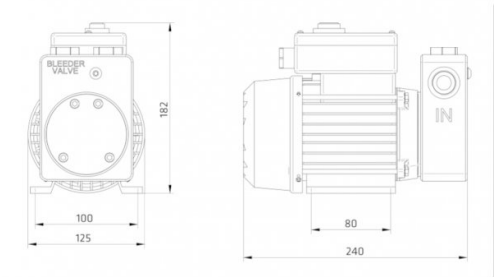

Technical features:

Flow rate (1 bar) :	50 lt/min
Voltage :	230V 50Hz
Max Pressure :	2,5 Bar
IN :	F 3/4" BSP
OUT :	F 3/4" BSP
Suction :	3 mt
Priming :	Automatic
Integrated filter :	Not included
Bleeder valve :	Included
Motion transmission :	Crankshaft
Pump Body :	Delrin
Type rotor :	5 vanes
Rotor insert :	Stainless steel
By-pass :	Included
Seal :	6 bar Mechanical seal FKM / VITON
AntiFlood protection :	Included
Motor thermal protector :	Included
Engine Rotation :	2800 rpm
Power :	373watt (0,5hp)
Motor Frame :	63 MEC
IP rating :	54 IP
Ampere :	2,2 Ah
Switch ON-OFF :	Included
Compatible Liquids :	AdBlue®
Duty cicle :	S1 continuous
Packaging :	25x17x23h cm
Weight :	6,5 Kg

QUALITY IS OUR JOB

Via dell'Artigianato, 2 62014 Petriolo MC Phone: 0733 550173 Fax: 0733 550196 Email: contact@tomes.it